

MYSPOT-IV
NK-03 Series

Inverter-controlled **TABLE SPOT WELDER**

NK-03HV100-20-K-EZ



MADE IN JAPAN

[SPECIFICATIONS]

TRANSFORMER	: Inverter
RATED CAPACITY	: 40kVA AC380 ~ 480V 1Φ 50/60Hz
GUN TYPE	: HORIZONTAL, VERTICAL
MAXIMUM CURRENT	: H12000Amp, V13000Amp
AIR PRESSURE	: 0.6Mpa
ELECTRODE FORCE	: H2.5kN, V2.2kN
GUN LENGTH	: 690mm
VGUN STROKE	: 500mm
DUTY CYCLE	: 7%
TABLE SIZE	: $\pm 15 \times 1000 \times 2000$ mm
TABLE HEIGHT	: 600mm(FIXED)
COOLING WATER	: 8.5L/min or more
ELECTRODE TIP	: $\phi 13$ or $\phi 16$ (TAPA1/10)
COOLING UNIT	: EQUIPPED
MACHINE SIZE	: W2000×D2000×H2535mm

Reference of Welding Capacity :

Mild Steel	(2.3×2.3mm)	Galvanneal	(2.3×2.3mm)
Stainless	(2.5×2.5mm)	Galvanized	(2.3×2.3mm)

*Above mentioned materials are slightly different by manufacturer, or by country in the process of production. KOYO GIKEN INC. warrants the performance of our product MYSPOT, not warrants those materials and its thickness.


NEW TIMER ~QUICK AND EASY TO SET.

EasySetting
EasyTimer




Reference parameter appears by only selecting material and thickness.

Pressure setting and water flow check automatically.
Tip dress counter equipped.



MYSPOT reaches deep location of weld points!

You can weld NUTS too!

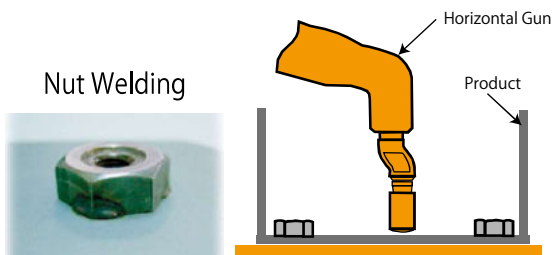

Anti-Oxidation System for Stainless Steel



Produces cleaner welds with no burn marks on the finish side of stainless assemblies.

koyo giken

www.koyogiken.co.jp

KOYO GIKEN INC.

2-7-6 Hashimotodai Midori-ku Sagami-hara-City Kanagawa-Pref. 252-0134
TEL +81-42-770-4306 FAX +81-42-770-4310 E-MAIL info-hp@koyogiken.co.jp